



Sartosteel

Removing Particles from Liquids, Gas and Steam

Product Information

Sartosteel stainless steel depth filter cartridges contain sintered, homogeneous, 0.4 mm thick non woven stainless steel mesh layers, which are reinforced on both sides by mesh supports. These filters are used for removing particles from liquids and gases (steam). Sartosteel filter cartridges offer the user maximum security along with low filtration costs.



Applications

Sartosteel is applied in biopharmaceutical process such as:

- Steam filtration
- Condensate filtration
- Water filtration

Further Applications

Chemical Industrie

- Polymer filtration
- Catalyst retention
- Gas filtration ($\geq 80^{\circ}\text{C}$)
- Cleaning agents

Machine-building|Automotive Industries

- Fuel filtration
- Hydraulic oils

Product Benefits

- High dirt-handling capacity
- High mechanical stability
- Homogeneous material construction
- Absolutely leak-proof connections between end caps and filter unit

Quality Control

Sartosteel are designed, developed and manufactured in accordance with a DIN ISO 9001 certified Quality Management System.

Technical Data

Specifications

Materials
Sintered non woven stainless steel media, reinforced on both sides with sintered-on mesh

Filter Media	AISI 316 L
Support Mesh	AISI 304 316 L
Outer Support	AISI 304 316 L
Core	AISI 304 316 L
End Caps	AISI 304 316 L
Gaskets	silicone*

* standard: also available in Fluoroelastomer and EPDM

Retention Rate

3 µm

Available Sizes | Filtration Area

Size 9 (Mini Cartridge)	9"	200 cm ² 0.2 ft ²
Size 1	10"	500 cm ² 0.5 ft ²
Size 2	20"	1.000 cm ² 1.0 ft ²
Size 3	30"	1.500 cm ² 1.5 ft ²

Operation Parameters

Max. differential pressure:

≤ 20 bar, in the direction of filtration

≤ 1 bar, opposite to the direction of filtration

Resistance | Compatibility

thermal up to 200°C (not with silicone sealing)


chemical inert to caustic solutions, solvents not compatible with aggressive and relatively high concentrations of acid (≥ 5%)

Ordering Information

Order Code	Retention Rate [µm]	Adapter Type	Height	Pack Size [Pieces]
Mini Cartridge				
5701502S9	3	15*	9"	1
Cartridges				
5702502S1	3	25	10"	1
5702502S5	3	25	20"	1
5702502S3	3	25	30"	1
5702802S1	3	28	10"	1
5702802S5	3	28	20"	1
5702802S3	3	28	30"	1


* Bayonet adapter with internal O-ring

Particle retention rating 3 µm Sartosteel

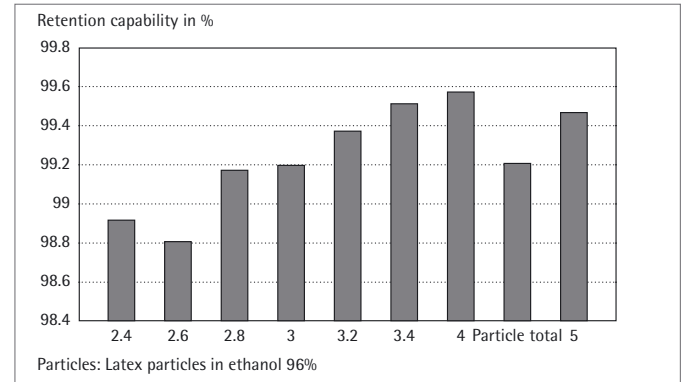

Sartosteel – saturated steam

(T = 121°C, P = 1 bar system pressure)

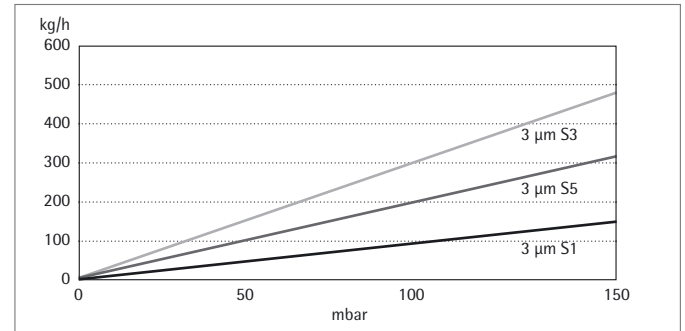

Sartorius Stedim Biotech GmbH
August-Spindler-Strasse 11
37079 Goettingen, Germany

Phone +49.551.308.0
www.sartorius-stedim.com

USA Toll-Free +1.800.368.7178
Argentina +54.11.4721.0505
Brazil +55.11.4362.8900
Mexico +52.55.5562.1102
UK +44.1372.737159
France +33.442.845600
Italy +39.055.63.40.41
Spain +34.913.586.098
Russian Federation +7.812.327.53.27
Republic of South Africa +27.11.315.5444
Japan +81.3.4331.4300
China +86.21.6878.2300

Specifications subject to change without notice.
Copyright Sartorius Stedim Biotech GmbH.
Printed in the EU on paper bleached without chlorine.
Publication No.: SPK2053-e140504
Order No.: 85030-517-78
Ver. 06 | 2019